
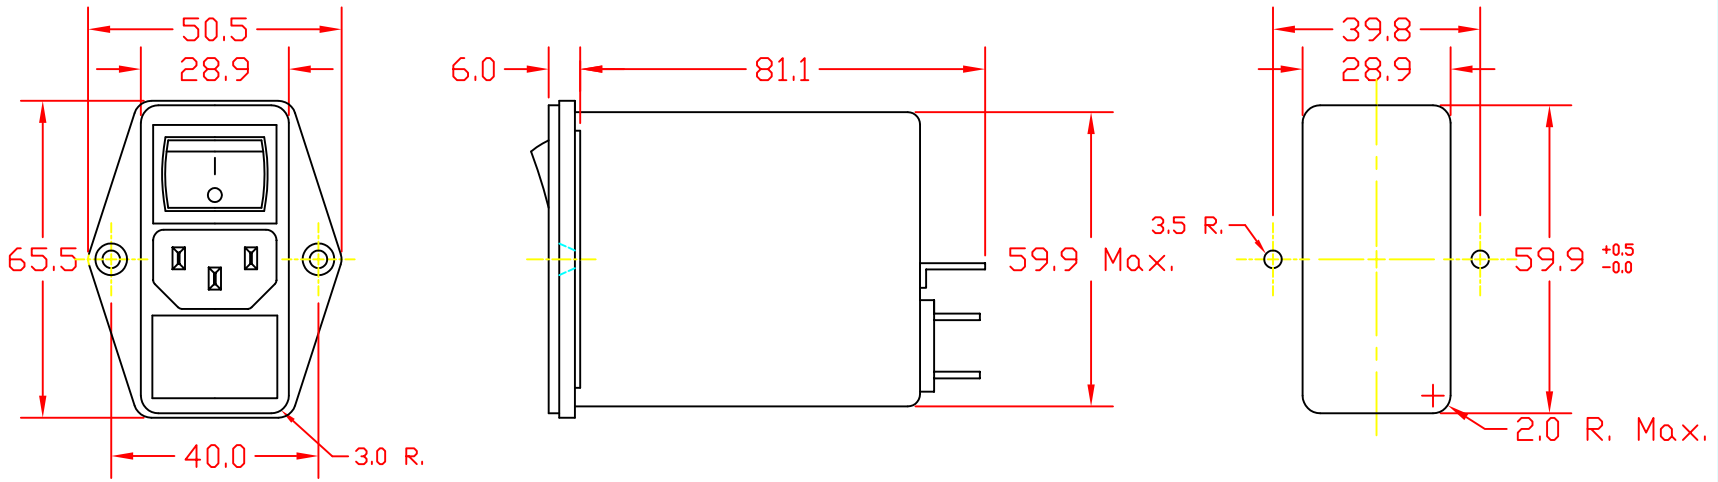


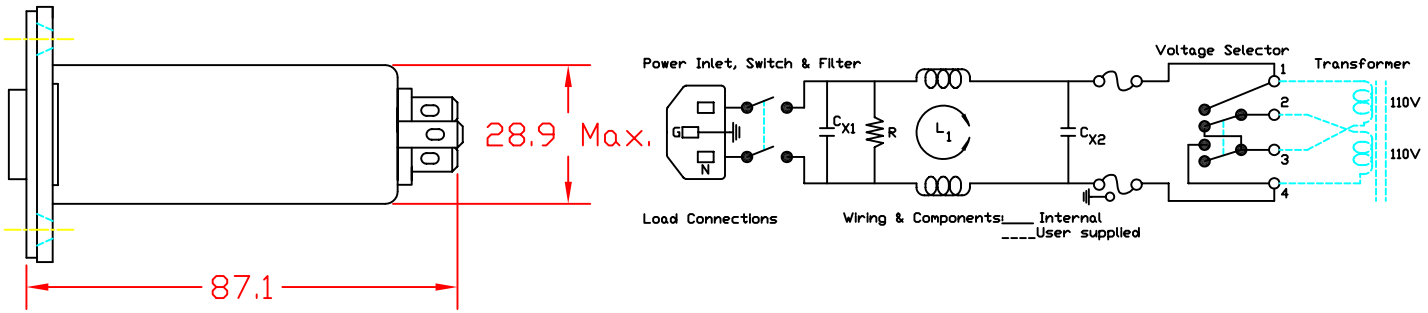

Maximum Leakage Current (L-G) @115VAC/60Hz	Maximum Leakage Current (L-G) @250VAC/50Hz	C1 Capacitor	C2 Capacitors	Inductor	Min. common mode insertion loss (L-G) (dB in 50 ohm sys.) Freq. - MHz	Min. diferential mode insertion loss (L-L) (dB in 50 ohm sys.) Freq. - MHz
					.05 .10 .15 .50 1.0 5.0 10 30	.05 .10 .15 .50 1.0 5.0 10 30
2μA	5μA	.220μF	.1μF	2x2.5mH	10 15 20 30 35 25 20 10	2 5 3 40 50 40 40 35

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPRIETARY CONFIDENTIAL PROPERTY OF INTERPOWER CORPORATION. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM INTERPOWER CORPORATION.

REV	CHANGE DESCRIPTION	DATE	INITIALS

DIMENSIONS IN MILLIMETERS

DRAFT BY: JPC DATE: 5-5-2003

DRAFTING APPROVAL: DATE:

MATERIAL:

TITLE Module

PART NUMBER: 83511430

DO NOT SCALE

SHEET 1 OF 1

INTERPOWER CORPORATION